

### APPLICATION

Refrigerant	R600a
Application	LBP
Expansion Device	Capillary
Cooling Type	Static
Evaporation temp. range	-35°C to -10°C

Max. Ambient temp.	43 °C
Max. Steady discharge temp.	120 °C
Max. Peak discharge temp.	135 °C
Max. Steady condensing temp.	60 °C
Max. Peak condensing temp.	70 °C
Max. Winding temp.	130 °C

### BASIC PARAMETER

Compressor Model	HPL100A
Displacement	5.7 cc
Net Weight	7.6 kg
Oil Type	WF5A
Oil Charge	120 cc
Oil Viscosity @40°C	5 cSt

Power Supply	220~240 V
Voltage Range	187~264 V
Frequency	50 Hz
Motor type	RSCR
Electrical insulation class	B
Height ( H )	161 mm

### ELECTRICAL DATA

Enamelled Wires Material	Cu
Main Wind. Resistance @20°C	37.25 Ω
Start Wind. Resistance @20°C	40.33 Ω
Locked Rotor Current @220V	5.67 A
Locked Rotor Current after 4s	2.42 A

Connecting board	GD,GDI,GD-3
Run Capacitor	
Type	Plastic or metallic case
Capacitance	2+15 uf

### PERFORMANCE DATA


Cooling Capacity	Input Power	COP	Current
W	W	W/W	A
100	51	1.96	0.26

Evaporating temp.	-23.3 °C
Condensing temp.	+55 °C
Subcooling temp.	+32 °C
Suction temp.	+32 °C
Ambient temp.	+32 °C

Starting test with capacitor	Motor Temp./Equalized Press.	
	90°C/3Bar A	43°C/3.5Bar A
Min. Starting Voltage	167	162

Acoustic test	A-weight SWL	Vibration
	dBA	m/s2
-20°C/+50°C	37	0.61

### COMPRESSOR OUTLINE

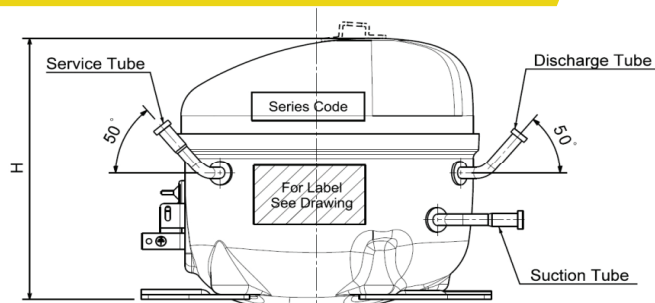

\* H is shown in basic parameter.

